

Lift2K™ & Lift25K™

SCISSOR LIFT TABLES

Bishamon®



The Bishamon-designed Lift2K & Lift25K Scissor Lift Tables are the best value 2000 & 2500 lbs. capacity lifts on the market today. They have maximum lifting heights of 29.25 inches with platform sizes of 28 x 48 and 36 x 48 inches. The lowered height of both models is 8.43."

No matter how you compare it, the Bishamon Lift2K & Lift25K lift more for less. They are designed to increase productivity and reduce worker strain in today's harsh industrial environments. By lifting and accurately positioning the load, the Lift2K and Lift25K lift tables eliminate unproductive lifting and stretching that ultimately leads to worker fatigue injuries and possible product damage.

The Lift2K and Lift25K are available in two platform sizes, offer options for bellows, portability, rotating platform and foot operated control. They meet all ANSI Standards for lift tables.

Bishamon

Bishamon Industries Corporation

5651 East Francis Street
Ontario, California 91761-3601

(909) 390-0055 • (800) 358-8833

Fax (909) 390-0060

www.bishamon.com


Warranty - Bishamon Industries Corp. ("Bishamon") warrants its products to be free from defects in material and workmanship for a period of one (1) year from the date of initial shipment. This warranty shall not apply to any misuse, mishandling, accident, shipping, alteration, or unauthorized repair of any Bishamon product or part. For complete details of warranty, please contact Bishamon at 800-358-8833.

Lift2K™ & Lift25K™

SCISSOR LIFT TABLES

Working Harder To
Make Your Life Easier

Lift2K Lift Table Dimensions

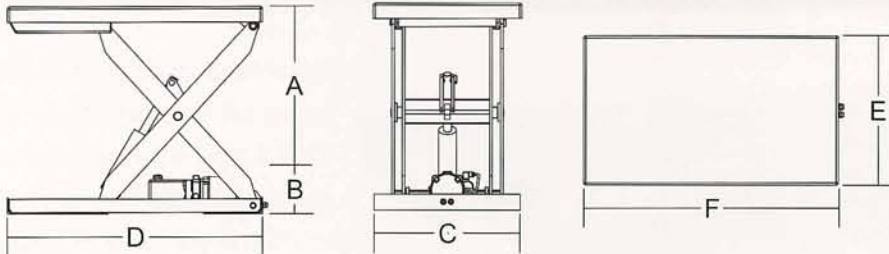

Selector Table for Lift2K Lift Tables

Model	Travel (inches) (A)	Capacity (pounds)	Lowered Ht. (inches) (B)	Raised Ht. (inches) (A) + (B)	Base Size (inches) (C) x (D)	Platform Size (inches) (E) x (F)	Approx. Up Time* (seconds)	Approx. Down Time* (seconds)
L2K-2848	30.50	2,000	8.75	39.25	30 x 50.5	28 X 48	22	29
L2K-3648	30.50	2,000	8.75	39.25	30 X 50.5	36 X 48	22	29
L25K-2848	30.50	2,500	8.75	39.25	30 x 50.5	28 X 48	22	29
L25K-3648	30.50	2,500	8.75	39.25	30 X 50.5	36 X 48	22	29

* Approximate up and down times are for a lift with no load. The loaded up time will be slightly longer and loaded down time will be slightly less.

Standard Features

- Complies with ANSI standards for lift tables
- Unparalleled price for a 2,000 or 2,500 lb. capacity lift
- Heavy-duty NEMA 12 hand control is rated for 120 volt, 25 amp. operation
- New heavy-duty unitized power unit operates on a standard household 115 volt outlet
- New power unit eliminates previous duty cycle restrictions and operates at low hydraulic pressure (<1500 psi)
- New 3 inch bore cylinder provides smooth gravity-down operation
- Cylinder flow limiting valve protects the operator in the event of a hydraulic line failure
- See-through reservoir for easy fluid level identification
- Hinged maintenance catches painted safety yellow
- Entrapped scissor rollers for increased stability
- Durable powder coat finish

Accessories

- Bellows guard
- Rotating Platform
- Semi-live portability
- Foot control



New single acting cylinder with flow limiting valve provides safe gravity-down operation



New 115 volt unitized power unit eliminates previous duty cycle restrictions



Hinged maintenance catches for convenience and added safety



Heavy-duty, NEMA 12 hand control for safe, convenient lift operation - Shown with optional foot control

Bishamon

5651 East Francis Street
Ontario, California 91761-3601

(909) 390-0055 • (800) 358-8833
Fax (909) 390-0060

www.bishamon.com

DISTRIBUTED BY:

INCREASING YOUR PRODUCTIVITY
DACO
MATERIAL HANDLING & PACKAGING SOLUTIONS
www.DACOcorp.com
800-345-3226