



PALLET MULE


3 1/8" AND 2.9" STANDARD LOWERED HEIGHT PALLET TRUCKS



All American made, *Pallet Mule* offers the largest combination of standard size pallet trucks in the industry (over 36), with one piece ductile iron pump, polyurethane on aluminum hub steering and load wheels (standard).


Grease Fitting Model Also Available includes (15) grease inserts, at all pivotal points

Fork Widths	Fork Lengths	Lowered Heights	Weight Capacity
27, 24, 21"	48, 42, 36"	3 1/8"	5000 lbs.
27, 24, 21"	48, 42, 36"	2.9"	5000 lbs.
27, 24, 21"	48, 42, 36"	3 1/8"	5500 lbs.
27, 24, 21"	48, 42, 36"	2.9"	5500 lbs.

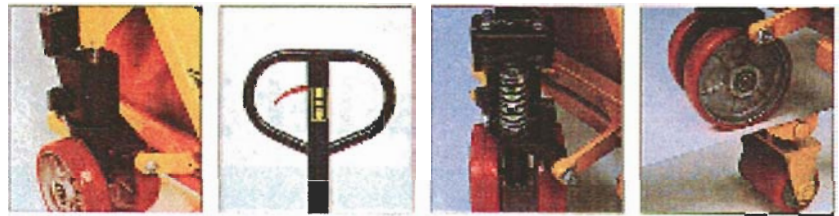

- Rebuildable, one-piece, ductile iron pump body.
- No weld construction for leak-free performance.
- Chrome-plated ram.
- Factory tested to average lifetime use.
- Polyurethane o-rings and u-cups at all high pressure wear points.
- Designed for strength and safety.
- Switch from pump to neutral or lower quickly and easily.
- No foot pedal ensures safe operation.
- Neutral position allows free handle movement when truck is in motion.
- Articulation axle allows both wheels to maintain contact with floor on uneven surfaces.
- Bellcrank provides superior load stability and steering.
- Automatic handle return assumes upright position when released.
- Wheel construction features polyurethane bonded to aluminum for extra strength and durability.
- Double sealed, heavy duty ball bearings are lifetime lubricated for easy maintenance.
- Same bearing used in steering and load wheels.

CORROSION RESISTANT PALLET TRUCKS

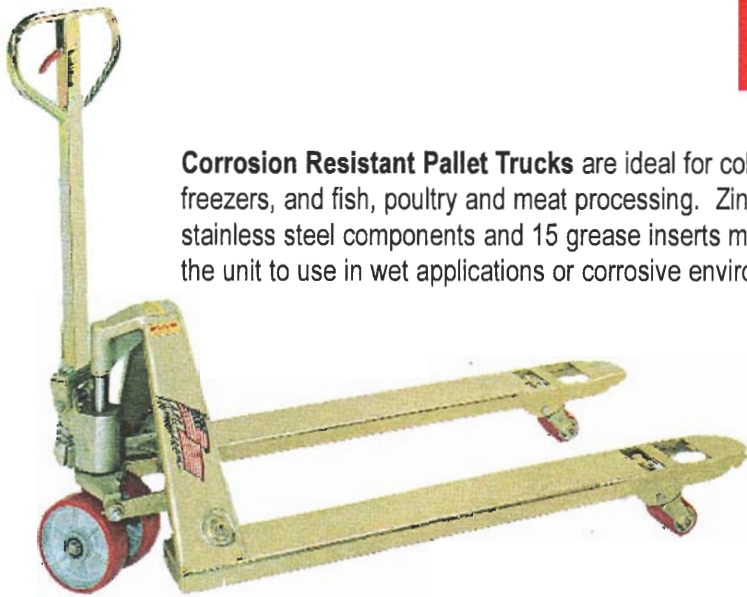

Corrosion Resistant Pallet Trucks are ideal for cold storage, freezers, and fish, poultry and meat processing. Zinc plated, stainless steel components and 15 grease inserts make this the unit to use in wet applications or corrosive environments.



- Three position finger tip release lever.
- Safety designed loop handle.
- Automatic return rectangular handle reinforced at stress points.
- Frame, pump and handle are zinc plated and Polymec coated for additional protection.
- One piece ductile iron pump body.
- Stainless steel lift ram, piston, and release plunger.
- Fifteen grease inserts, at all pivotal points.
- Polyurethane o-rings and u-cups at all high pressure wear points.
- Polyurethane steering and load wheels on aluminum hubs.
- Cast metal toes with entry wheels for added strength and ease of entering pallet.
- All axles are stainless steel.

Fork Width	Maximum Length	Minimum Length	Maximum Width	Minimum Width	Maximum Capacity
6"	96"	24"	60"	14"	6500 lbs.
6"	96"	24"	60"	14"	6000 lbs.
6"	96"	24"	60"	14"	5000 lbs.
5"	72"	24"	60"	14"	3000 lbs.
4"	48"	24"	60"	14"	2000 lbs.
3"	48"	24"	60"	14"	1000 lbs.

