

FORDLOGAN WOVEN WIRE PARTITIONS

WELDED WIRE PARTITIONS | VERSATILE MESH ENCLOSURES | WIRE MESH LOCKERS | RACK AND MEZZANINE GUARDING

SPACEGUARD
PRODUCTS™



STANDARD-DUTY WOVEN WIRE PARTITIONS

- Proven, industry standard design: triple-crimped diamond wire mesh
- Lasting protection of materials and personnel at a lower cost

STOCKED FOR QUICK SHIPMENT

- Standard gray material stocked in 7', 8' & 10' heights
- Same bolt patterns shared across standard heights for easier installation
- Save time and money: stock components ship in 48 hours or less

AFFORDABLE... EFFECTIVE... SPECIFIED EVERYWHERE

- Data center and colocation server cages
- Tool cribs and anti-pilferage supply storage
- Maintenance and driver cages
- Walk-in cooler and liquor enclosures for the food and beverage industry
- Full visibility enclosures allow unrestricted air and light circulation for plumbing and utility systems
- New construction ranging from school equipment storage to elevator and stairway partitions



FORDLOGAN WOVEN WIRE PARTITIONS

WELDED WIRE PARTITIONS | VERSATILE MESH ENCLOSURES | WIRE MESH LOCKERS | RACK AND MEZZANINE GUARDING

SPACEGUARD
PRODUCTS™



PANEL-TO-POST
CONNECTION



WOVEN WIRE
MESH



BASE SHOE
FLOOR CONNECTION

SPECIFICATIONS

PANELS: Constructed of 10-gauge, triple crimped steel securely clinched to frames. Vertical frames made of 1¼" x 5/8" roll-formed 'C' type channels. Horizontal frames made of 1" x ½" roll-formed channels. All frames mortised and tenoned at corners and equipped with slotted holes for quick, easy mounting. Panels include 3.7" sweep space to allow for housekeeping or optional cold-rolled sweep guard secured to panel frame and floor available for high security applications.

1½" x ½" roll-formed top capping channels bolt through horizontal frame of panel to enclose wires and provide rigidity.

POSTS AND CONNECTIONS: *Corner Posts* constructed of 1¼" x 1¼" x 1/8" thick angle for 90° corners. *Adjustable Corner Post* with hinges welded to roll-formed C-channels for all other corner specifications. *Line/Stiffener Posts* constructed of 3½" x 1¼" channel with 4" x 7½" base plates for reinforcing fencing. Recommended usage is every 15 linear feet on 7' and 8' high systems and every 10 linear feet on 9', 10' and 12' high systems. *Three-Way Posts* are 1¼" U-shaped and punched on all three sides to secure and interconnect multiple enclosures. *Base Shoes* are 2" die cast with two holes to accept ¼" diameter anchor for securing to the floor; with setscrew for leveling.

HARDWARE: FordLogan uses heavy-duty ¼" hex head bolts and nuts. ¼" and 3/8" wedge anchors provided for most floor and wall connections.

DOORS: Hinged, hinged-dutch, bi-parting hinged, slide and bi-parting slide doors are available. Each is constructed of same materials as panels in a wide assortment of widths, heights and arrangements. Sliding doors are equipped with two-wheel ball bearing trolleys, enclosed track, door guide and lock keeper. Standard hinge doors are interchangeably designed to hinge left or right and open in or out. Several lock options available upon request.

SERVICE WINDOWS: Slide-up 24" wide x 21½" high opening with 24" wide x 12" deep, 12 gauge shelf centered in opening.

FINISHES: Two-stage phosphate washed. Quick cure, factory applied powder coat finish in gray. UV and weather resistant. Optional black, yellow, red, blue, green, and white or color match available for nominal upcharge.

CALL US FOR
LEED INFO

AUTHORIZED DISTRIBUTOR:

INCREASING YOUR PRODUCTIVITY

DACO

MATERIAL HANDLING &
PACKAGING SOLUTIONS


www.DACOcorp.com

800-345-3226

HOW TO ORDER

Make a rough floor plan of area to be enclosed. Note critical measurements and secure side of enclosure.

Fax or email plan to our sales team at sales@spaceguardproducts.com

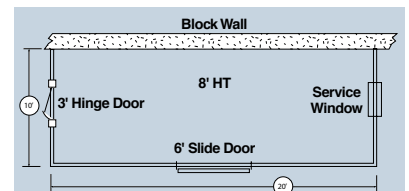

711 South Commerce Drive, Seymour, Indiana 47274
p 800.841.0680 | f 800.428.5758
www.spaceguardproducts.com