



enviro[®]

Cold Storage Doors

■ EXCEPTIONAL VALUE

High strength, clean and durable fiberglass door panels. One piece pultruded construction insures a heavy-duty completely sealed product, ideally suited for corrosive environments. Built with superior quality and reliability, this door offers proven design, functionality and exceptional value.

■ INNOVATIVE CONSTRUCTION

Enviro provides durable fiberglass panels with reinforced finished edges. Hardware locations are also reinforced with solid resin impregnated, pultrusions. Pultruded fiberglass frame provides maximum strength, cleanability and corrosion resistance.

■ TIGHT SEAL

Utilizing a frame mounted, continuous three-sided perimeter gasket, coupled with a bottom sweep gasket.

■ SECURE INTERLOCKS

Variety of electronic and mechanical locking options to meet the strictest FDA requirements. Enviro will design and supply a state-of-the-art interlocking system from the basic two door interlock to an entire production floor.

■ COMPLETE DOOR SYSTEM

Enviro provides a complete door system from panel choice, frame design, hardware selection, and interlocking design, to complement any environment. This ensures an uninterrupted process in completing your project by maintaining a single source relationship.

■ UNMATCHED QUALIFICATIONS

Our professional sales consulting team will ensure your requirements, while maintaining our uncompromising dedication to quality and value added service.

MODEL 130/135

Paired Swinging Fiberglass Door System

MODEL 130 MANUAL | 135 POWER



Shown with optional kickplates and vision panels.

Innovative Design. Superior Performance. Exceptional Value.

THE INDUSTRY'S TOP PERFORMING VALUE ENHANCED DOOR SYSTEM

Performance and value are key considerations for facilities professionals across a variety of industries. Enviro personnel doors confirm, that cost effectiveness does not have to mean a sacrifice in quality. Enviro's smooth, durable fiberglass panels with finished edges and reinforced hardware locations are designed to look great and provide reliable operation, year after year, even in harsh, wet or corrosive environments.

Superior aesthetics, uncompromising quality, exceptional reliability and unmatched value define Enviro personnel doors. Designed from the ground up to far exceed the offerings of other door manufacturers, yet priced to meet demanding budget constraints, this fiberglass door is truly a "no compromise" solution.

Enviro: high performance, lower operational costs, greater value.

THE LEADER IN COLD STORAGE DOOR INNOVATION

Enviro | ASI Doors, Inc.

5848 North 95th Court | Milwaukee, WI 53225

PHONE: 414.464.6200 | FAX: 414.464.9863 | TOLL-FREE: 800.558.7068

www.envirodoors.com



enviro[®]
Cold Storage Doors

MODEL 130/135

Paired Swinging Fiberglass Door System

MODEL 130 MANUAL | 135 POWER

DESIGN AND CONSTRUCTION

DOOR SIZES

- Up to 8' wide x 9' high.
(For larger sizes, consult factory.)

PANEL CONSTRUCTION

- 1 3/4" thick fiberglass panel surface with finished edges of reinforced, pultruded fiberglass tube.
- All hinge and hardware locations reinforced with solid resin impregnated pultruded fiberglass tube.
- Standard white color. (Other colors available upon request.)

FRAME CONSTRUCTION

- Pultruded fiberglass construction.
- Available in either single or double rabbet construction.
- Prepped for a wide variety of hardware options.

HARDWARE

- Grade 1 or 2 Architectural hardware standard.
- Standard weight steel fully mortised hinges.
- Norton heavy-duty closer.
- Frame mounted, three sided bulb type perimeter gasket and bottom sweep gasket.

PERFORMANCE FEATURES

- Manual open with standard spring assist closer.
- Power operation utilizing an electromechanical operator, microprocessor controlled in 120 volt, single phase, with mechanical spring close.
- Operator completely enclosed within an aluminum flat top shroud.
- Overhead presence sensor to provide threshold and swing side obstruction detection.
- Pushplate to open; time delay to close.
- In case of power failure, door can be opened manually at any time.

OPTIONS



- Vision panel with standard sloped frame.
- UL fire rated.
- 16 ga., 304 #4 stainless steel, face welded and polished frame.
- Custom designed interlocking system.
- Hospital stops 4".
- Stainless steel closer cover.
- Can provide any major lines and grades of architectural hardware.

OPTIONS (POWER MODELS ONLY)

- Touchless wall-mounted activation switch.
- Actuators: Variety of activation devices available upon request.

WARRANTY

- One year limited warranty on all components.

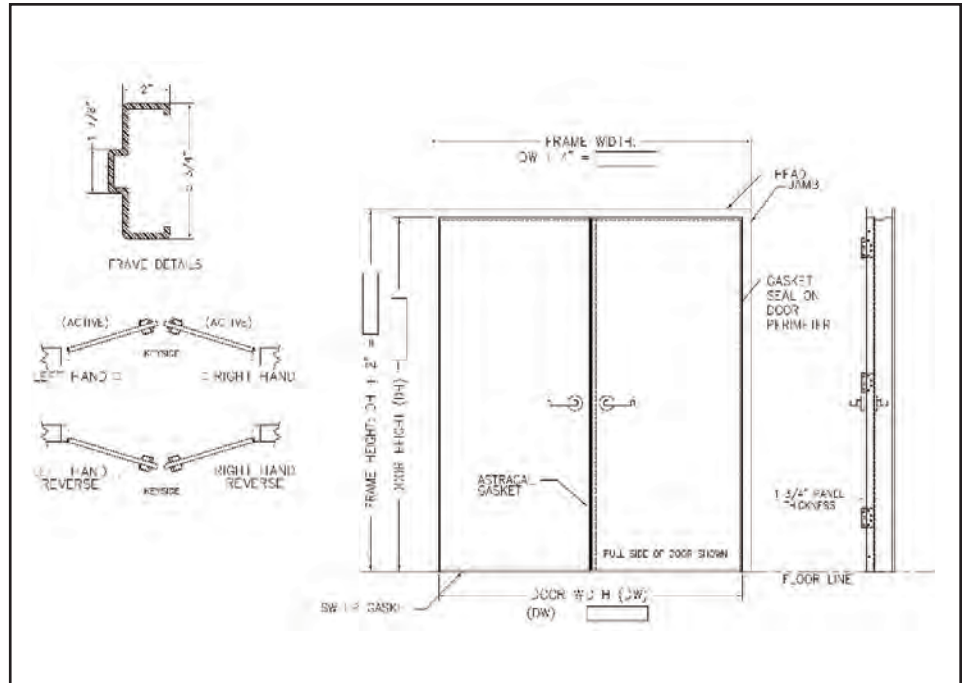

FRAME ASSEMBLY

Optional stainless steel frame is fully mitered and completely welded through the throat. Single or double rabbet.



SLOPED SHROUD FOR POWER UNITS

For superior cleanliness and aesthetic appeal.



STAINLESS STEEL CLOSER COVER

(Shown on stainless steel fire door)
Another option for superior cleanliness and aesthetic appeal.



FULLY MORTISED HINGES

(Shown on stainless steel door)
Flush mortised hinges provide a clean and smooth finish to the door.

THE LEADER IN COLD STORAGE DOOR INNOVATION

DACO

(877) 247-3834 - dacocorp.com

130/135 1 1 16